



Bronze Spring Check Valve

ISO 9001 FM584850

2017.1


Feature

1. solder ends
2. spring loaded
3. be installed in horizontal and vertical lines are all available
4. Working pressure 250psi


Connect ends comply to
ANSI B16.18
BS864

Working Pressure (unit : psi)	
Saturated Steam	cold Water, Oil, Gas
150	250
Test Pressure (unit : psi)	
Shell (Water)	Seat (Air)
375	80

100 psi = 7Kg (7bar) = 0.7Mpa

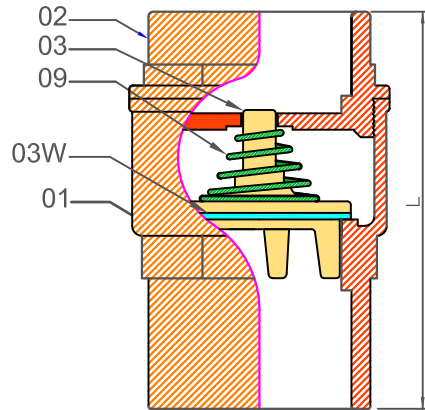

ST-700 for BUNA disc washer
ST-700F for PTFE disc washer

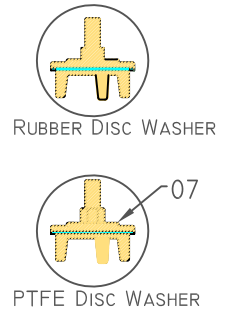

DIMENSION

unit : mm

SIZE	1/4"	3/8"	1/2"	3/4"	1"	1.1/4"	1.1/2"	2"
L	51	51	60	75	88	97	110	127

7	Disc holder	Brass C3604	Brass C6802	1
5	Spring	Brass B159	Brass B159	1
4	Disc washer	BUNA	BUNA	1
3	Disc	1/4"-11/4" 11/2"-2" Forged C3604 ASTM C84400	ASTM C89844	1
2	Cap	ASTM C84400	ASTM C89844	1
1	Body	ASTM C84400	ASTM C89844	1
No.	Parts	BRONZE	BRONZE Pb	Q'ty

Body Marking			
	"inch" SIZE	250 WOG	

Body Marking			
NL		"inch" SIZE	250 WOG

1. PTFE disc washer is available
2. SUS304 spring is available. (option)