



Bronze Spring Check Valve

ISO 9001 FM584850

2017.1

Feature

1. thread ends
2. spring loaded
3. be installed in horizontal and vertical lines are all available
4. Working pressure 250psi

Connect ends comply to



B.1.20.1 (NPT)

BS21.0 (BSPT)

Working Pressure (unit : psi)	
Saturated Steam	cold Water, Oil, Gas
150	250

Test Pressure (unit : psi)	
Shell (Water)	Seat (Air)
375	80

100 psi = 7Kg (7bar) = 0.7Mpa

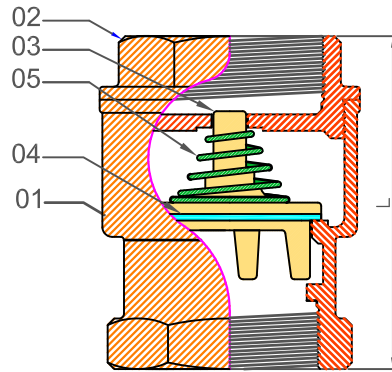

ST-701 for BUNA disc washer
ST-701F for PTFE disc washer

DIMENSION

unit : mm

SIZE	1/4"	3/8"	1/2"	3/4"	1"	1.1/4"	1.1/2"	2"
L	51	51	53	58	68	77	87	96

7	Disc holder	Brass C3604	Brass C6802	1
5	Spring	Brass B159	Brass B159	1
4	Disc washer	BUNA	BUNA	1
3	Disc	1/4"-11/4" ASTM C84400	ASTM C89844	1
2	Cap	ASTM C84400	ASTM C89844	1
1	Body	ASTM C84400	ASTM C89844	1
No.	Parts	BRONZE	BRONZE Pb	Q'ty

Body Marking			
	"inch" SIZE	250 WOG	

Body Marking			
NL		"inch" SIZE	250 WOG

1. PTFE disc washer is available
2. SUS304 spring is available. (option)