



# Bronze Transformer Globe Valve

ISO 9001 FM584850

2020.1


## Feature

1. single flange end conform to BS 4504
2. nebar packing on stem
3. flat flange without groove
4. Working pressure PN6

Body Marking		
	DN25	

Working Pressure non Shock	
cold Water, Oil, Gas under 120 C	3.5 Kgf/cm <sup>2</sup>

Test Pressure	
Shell (Water)	9 Kgf/cm <sup>2</sup>
Seat (Water)	7.6 Kgf/cm <sup>2</sup>
Seat (Air)	6 Kgf/cm <sup>2</sup>

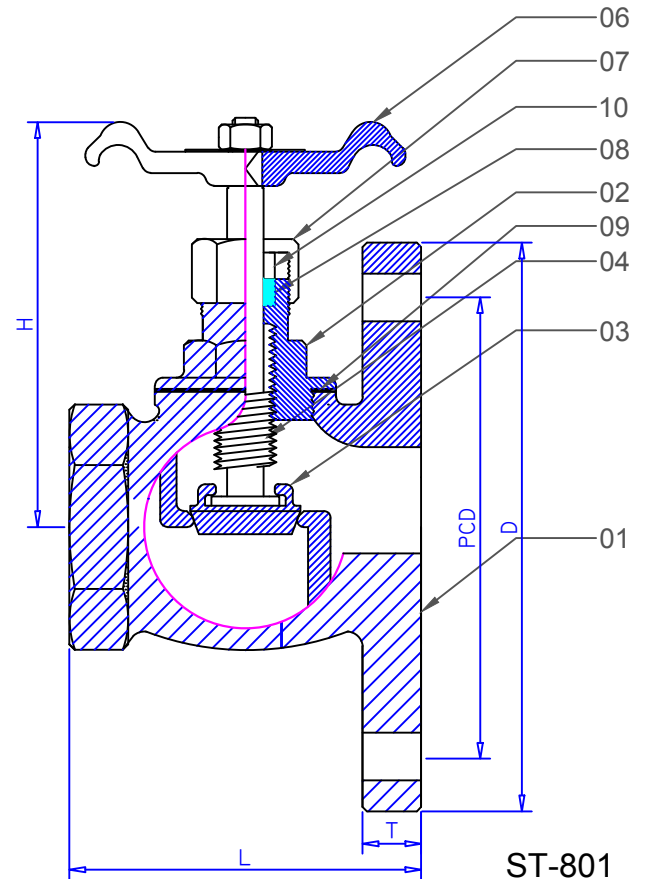

10	Packing Ring	Brass C3604	1
9	Gasket	Brass	1
8	Packing	PTFE	1
7	Packing Gland	Brass C3604	1
6	Handlewheel	Aluminum	1
4	Stem	Brass C36000	1
3	Disc	Brass C36000	1
2	Bonnet	Bronze RG5	1
1	Body	Bronze RG5	1
No.	Parts	Material	Q'ty

## DIMENSION

unit : mm

SIZE	H	L	D	PCD	T
DN15	80	48.5	80	55	7
DN25	84	72	100	75	10

Note. RG5 = BS EN CC491K = ASTM C83600