
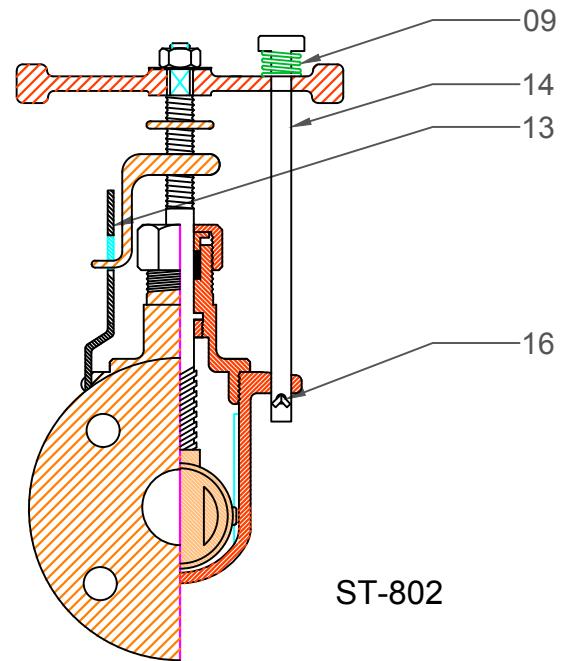


## Feature

1. flange ends conform to BS 4504
2. with position indicator and locking device.
3. flat flange without groove
4. Working pressure PN6

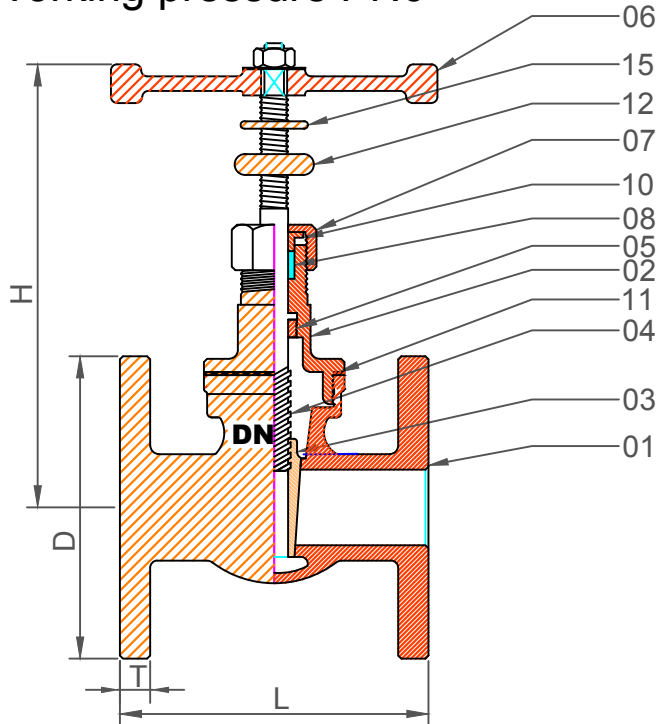

16	Split Pin	Brass	1
15	Indicator washer	Brass C3604	1
14	Locking Pin	Brass C3604	1
13	Indicator Plate	Brass sheet	1
12	Indicator	Bronze RG5	1
10	Packing Ring	Brass C3604	1
11	Gasket	Brass	1
9	Spring	Brass B159	1
8	Packing	PTFE	1
7	Packing Gland	Brass C3604	1
6	Handlewheel	Cast Iron FC20	1
5	Lock nut	Brass C3604	1
4	Stem	Brass C36000	1
3	Disc	Bronze RG5	1
2	Bonnet	Bronze RG5	1
1	Body	Bronze RG5	1
No.	Parts	Material	Q'ty

## DIMENSION

unit : mm

SIZE	H	L	D	T
DN25	137	102	100	10
DN50	208	136	140	12

### Working Pressure non Shock

 cold Water, Oil, Gas under 120 C 3.5 Kgf/cm<sup>2</sup>

### Test Pressure

 Shell (Water) 9 Kgf/cm<sup>2</sup>

 Seat (Water) 7.6 Kgf/cm<sup>2</sup>

 Seat (Air) 6 Kgf/cm<sup>2</sup>

### Body Marking

PN6	DN25	
-----	------	--

Note. RG5 = BS EN CC491K = ASTM C83600