



Bronze Globe Valve

ISO 9001 FM584850

2017.1

Feature


1. rising stem
2. SDNR type
3. 10Kgf/cm² saturated steam to 120°C or 248°F
4. working pressure PN20

Connect ends comply to

- B.1.20.1 (NPT)
- BS21.0 (BSPT)
- ISO-7 (Rc, Rp)

Working Pressure non Shock (unit : bar)	
Saturated Steam	cold Water, Oil, Gas
10.0	20.0
Test Pressure (unit : bar)	
Shell (Water)	Seat (Air)
30	6

100 psi = 7Kg (7bar) = 0.7Mpa

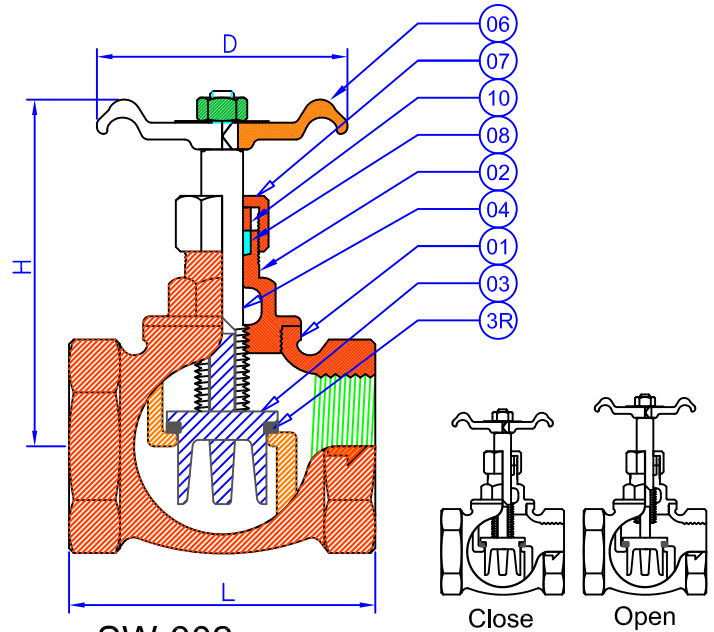

SW-302
SW-302NL

DIMENSION

unit : mm

SIZE	1/4"	3/8"	1/2"	3/4"	1"	1.1/4"	1.1/2"	2"	2 1/2"	3"	4"
H	70	70	70	75	90	115	120	140	157	192	221
L	45	45	50	57	65	75	85	100	120	137	153
W	54	54	54	61	68	76	76	83	105	112	132

N	Nut	Steel	Steel	1	
P	Nameplate	Aluminum	Aluminum	1	
10	Packing Ring	Brass C3604	Brass C3604	1	
8	Packing	Teflon	Teflon	1	
7	Packing Gland	Brass C3604	Brass C3604	1	
6	Handlewheel	Aluminum	Aluminum	1	
4	Stem	ASTM C36000	ASTM C6802	1	
3R	Disc washer	NBR	NBR	1	
3	Disc	ASTM C84400	ASTM C89844	1	
		1" ↑	ASTM C84400	ASTM C89844	
2	Bonnet	3/4" ↓	ASTM C36000	ASTM C6802	1
1	Body		ASTM C84400	ASTM C89844	1
No.	Parts	BRONZE	NL Pb	Q'ty	

Body Marking			
		"mm" SIZE PN20	➔

Body Marking			
		"mm" SIZE PN20	➔

Note. ASTM B62 C83600 is available
 Note. DZR (AS352) stem is available
 Note. Aluminum handle wheel is available