



ISO 9001 FM584850

Test pressure (MSS SP-80)		
shell test	37.5	bar
seat test	27.5	
air test	6	

100 psi = 7Kg (7bar)



Feature

1. Blow-out proof stem
2. Two piece design
3. Full port
4. working pressure PN25

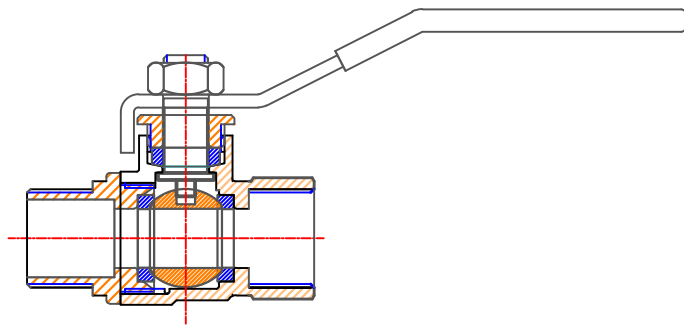


Fig. JD-F615 for M/F type

9	Seat	PTFE
8	Ball	Brass
7	Cap	Brass
6	Body	Brass
5	Packing	PTFE
4	Stem	Brass
3	Packing gland	Brass
2	Lever handle	Steel
1	Nut	Steel
No.	Part Name	Material

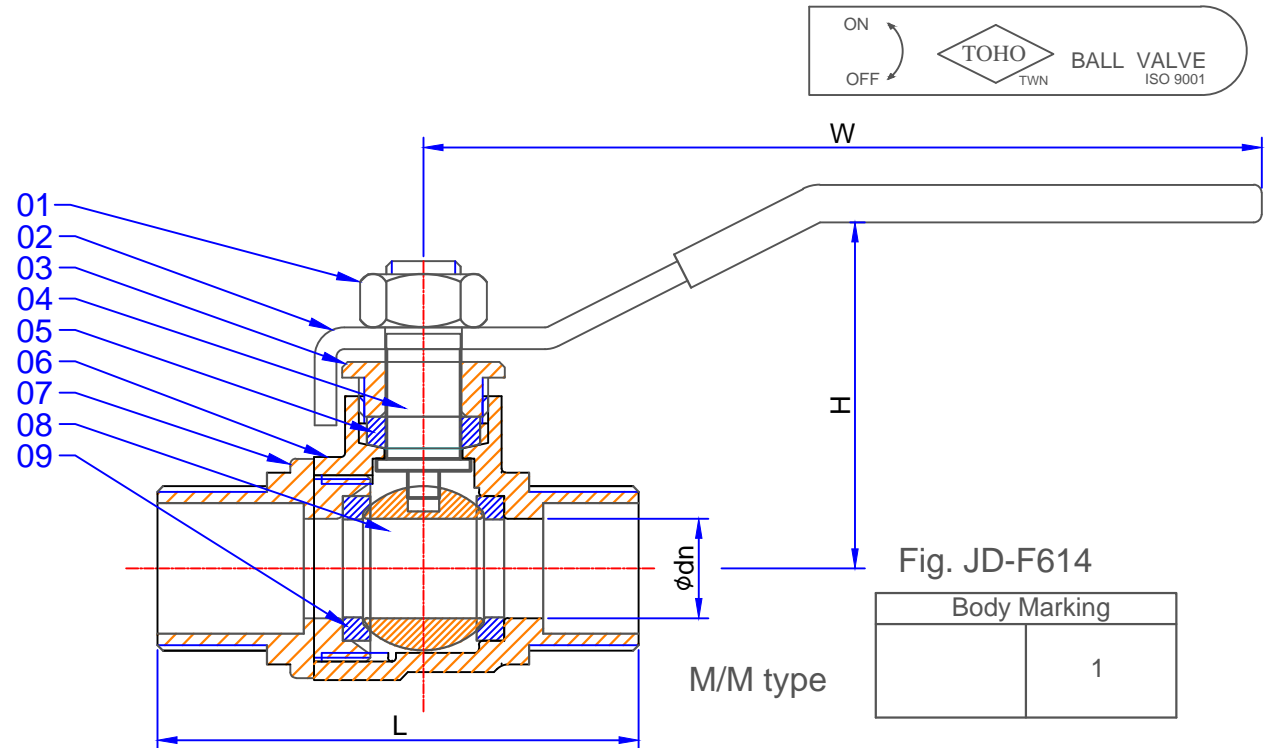


Fig. JD-F614

Body Marking	
	1

Dimensions

(mm)

Size	1/4"	3/8"	1/2"	3/4"	1"	1-1/4"	1-1/2"	2"	2-1/2"	3"	4"
H			48	52	62	67	74	85			
L			51	58	68	82	103	111			
W			89	92	103	116	133	144			
dn			14.5	19	25	30	37	46			