



ISO 9001 FM584850

Feature

1. non rising stem
2. screwed in bonnet
3. 150 psi saturated steam to 185 °C or 365 °F
4. working pressure 300 psi

Test pressure (MSS SP-80)		
shell test	450	psi
seat test	330	
air test	80	

100 psi = 7Kg (7bar)

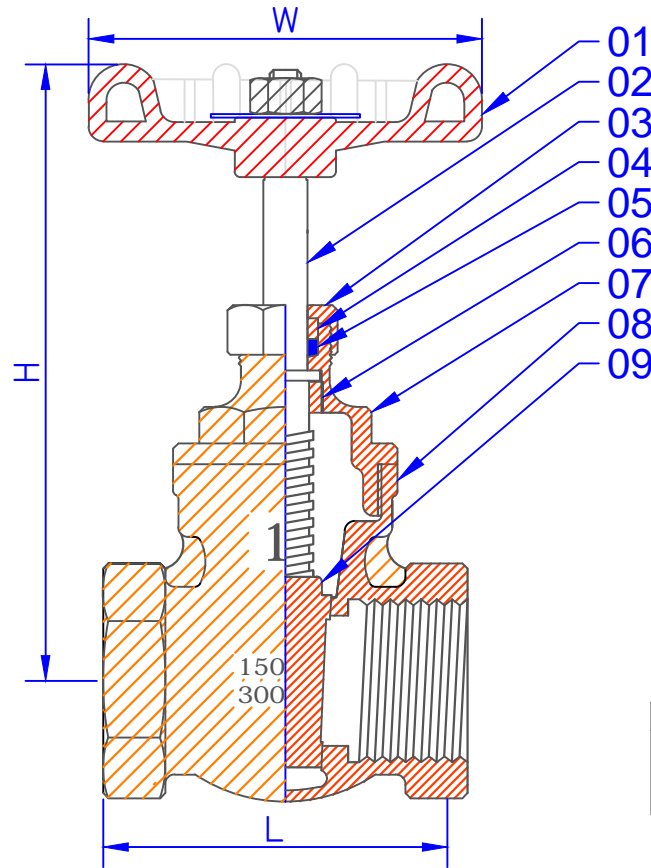


Fig. ST-201

Body Marking		
TOHO	2"	
	150WSP 300WOG	

9	Disc	Bronze
8	Body	Bronze
7	Bonnet	Bronze
6	Stem ring	Brass
5	Packing	PTFE
4	Packing ring	Brass
3	Packing gland	Brass
2	Stem	Brass
1	Handle wheel	Aluminum
No.	Part Name	Material

Dimensions

(mm)

Size	1/4"	3/8"	1/2"	3/4"	1"	1-1/4"	1-1/2"	2"	2-1/2"	3"	4"
H	85	85	88	95	110	135	142	162	200	215	290
L	43	43	47	51	61	65	68	72	97	100	117
W	54	54	54	61	61	77	77	83	105	112	132