



ISO 9001 FM584850

### Feature

1. rising stem
2. screwed in bonnet
3. 150psi saturated steam to 185 °C or 365 °F
4. working pressure 300 psi

Test pressure (MSS SP-80)		
shell test	450	psi
seat test	330	
air test	80	

100 psi = 7Kg (7bar)

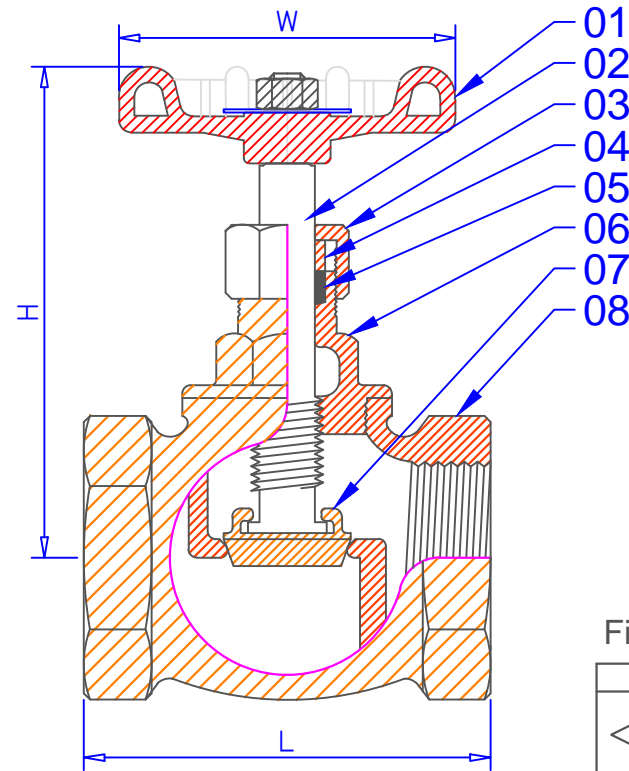


Fig. ST-301

Body Marking		
	2"	
	WT300LBS	

### Option

**ST-301R**  
(for Rubber disc washer)

**ST-301F**  
(for PTFE disc washer)

### Dimensions

(mm)

Size	1/4"	3/8"	1/2"	3/4"	1"	1-1/4"	1-1/2"	2"	2-1/2"	3"	4"
H	69	69	69	78	89	115	120	142	157	192	221
L	45	45	50	57	65	75	85	100	120	137	153
W	54	54	54	61	68	77	77	83	105	112	132

8	Body	Bronze
7	Disc	2-1/2" ↑ Bronze 2" ↓ Brass
6	Bonnet	1" ↑ Bronze 3/4" ↓ Brass
5	Packing	PTFE
4	Packing ring	Brass
3	Packing gland	Brass
2	Stem	Brass
1	Handle wheel	Aluminum
No.	Part Name	Material