



ISO 9001 FM584850

Feature

1. rising stem
2. screwed in bonnet
3. 150psi saturated steam to 185 °C or 365 °F
4. working pressure 300 psi

Test pressure (MSS SP-80)		
shell test	450	psi
seat test	330	
air test	80	

100 psi = 7Kg (7bar)

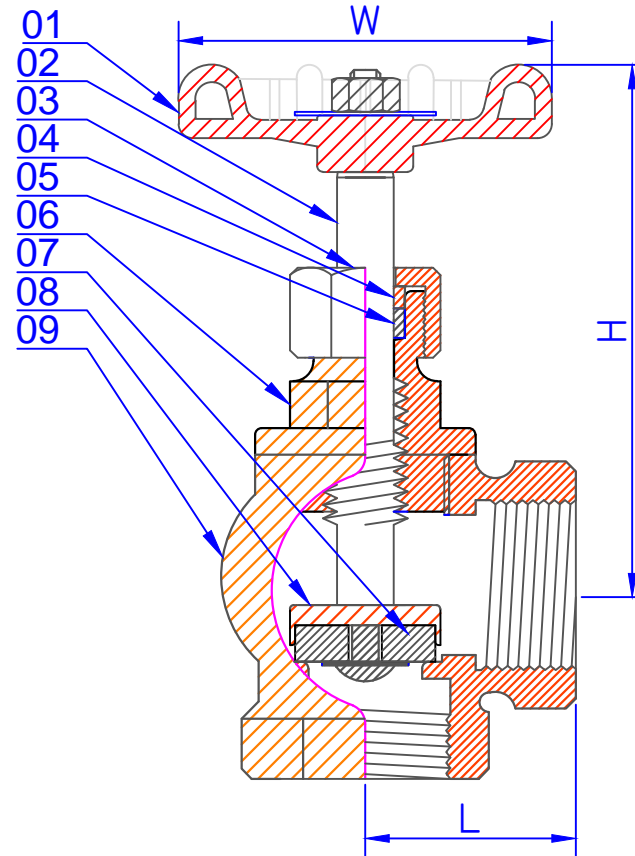


Fig. ST-501

Body Marking		
	2"	
	300	

9	Body	Bronze
8	Disc holder	Brass
7	Disc washer	NBR
6	Bonnet	Bronze
5	Packing	PTFE
4	Packing ring	Brass
3	Packing gland	Brass
2	Stem	Brass
1	Handle wheel	Aluminum
No.	Part Name	Material

Dimensions

	(mm)										
Size	1/4"	3/8"	1/2"	3/4"	1"	1-1/4"	1-1/2"	2"	2-1/2"	3"	4"
H	70	70	72	77	85	108	108	117	194		
L	25	25	26	31	35	42	49	61	74		
W	54	54	54	68	68	77	77	83	112		