



ISO 9001 FM584850

Test pressure (MSS SP-110)		
shell test	900	psi
seat test	660	
air test	80	

100 psi = 7Kg (7bar)



Feature

1. Blow-out proof stem
2. Two piece design
3. Full port
4. Working pressure 600WOG, 150WSP

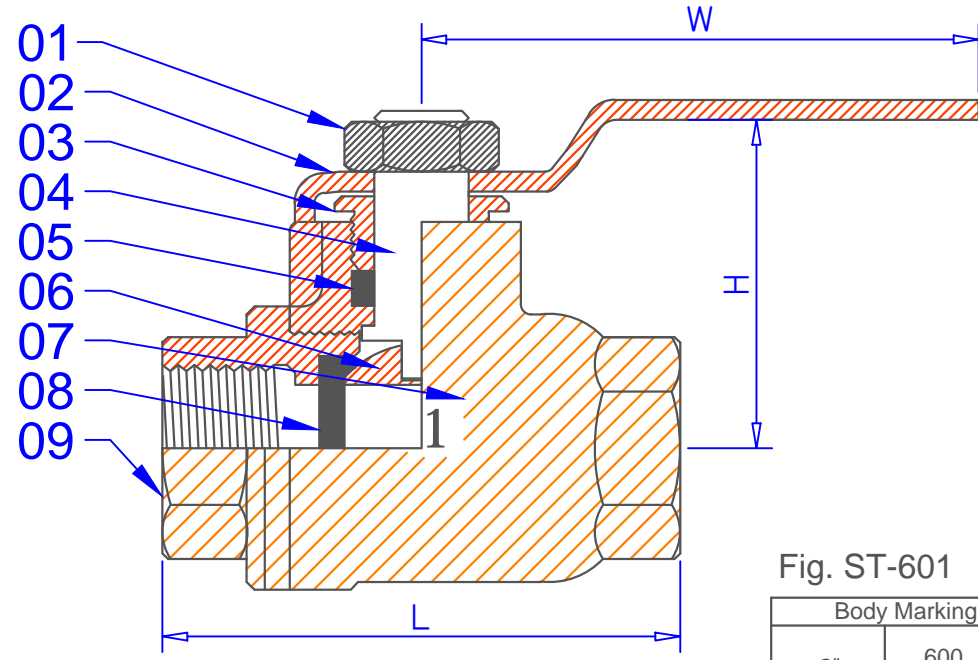


Fig. ST-601

Body Marking		
2"	600 WOG	

9	End cap	Bronze
8	Ball seat	PTFE
7	Body	Bronze
6	Ball	3/4" ↑ SS304 1/2" ↓ Brass
5	Packing	PTFE
4	Stem	Brass
3	Packing gland	Brass
2	Lever handle	Steel
1	Nut	Steel
No.	Part Name	Material

Dimensions

(mm)

Size	1/4"	3/8"	1/2"	3/4"	1"	1-1/4"	1-1/2"	2"	2-1/2"	3"	4"
H	47	47	47	56	63	72	75	88	112	130	
L	52	52	54	63	76	86	98	111	159	161	
W	106	106	106	111	111	136	136	180	219	219	