

Test pressure (MSS SP-80)		
shell test	24	bar
seat test	18	
air test	6	



Feature

1. non rising stem
2. cover bonnet, solder ends
3. 10kgf/cm² saturated steam to 185 °C or 365 °F
4. working pressure 16bar
5. comply to BS5154B

10	Disc	Bronze
9	Body	Bronze
8	Bonnet	Bronze
7	Gasket	PTFE or O-ring
6	Stem ring	Brass
5	Packing	PTFE
4	Packing ring	Brass
3	Packing gland	Brass
2	Stem	Brass
1	Handle wheel	Aluminum
No.	Part Name	Material

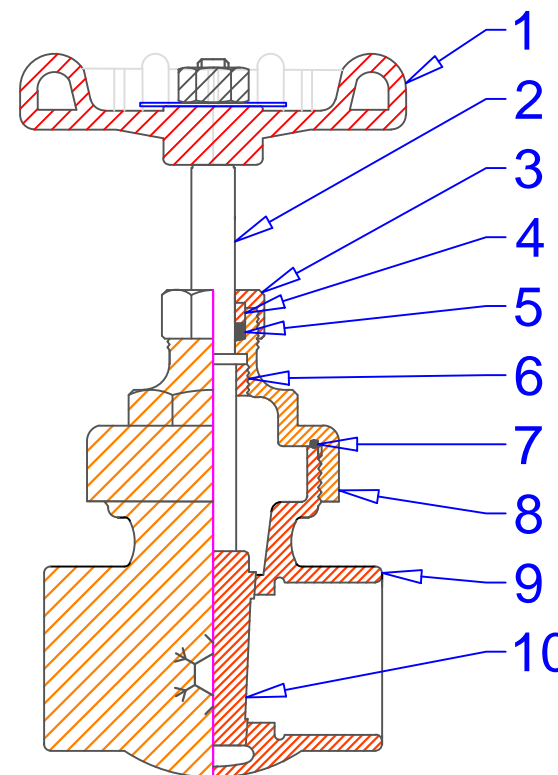


Fig. SW-104

Body Marking		
	BS5154	
	25mm	
	PN16	

Dimensions

(mm)

Size	8mm	10mm	15mm	22mm	28mm	35mm	42mm	54mm	65mm	80mm	100mm
H			85	94	105	125	140	155			
L			42	54	61	74	84	97			
W			54	61	61	77	77	83			