

Feature

1. non rising stem
2. screwed in bonnet
3. 10kgf/cm² saturated steam to 185 °C or 365 °F
4. working pressure 20bar
5. comply to BS EN 12288A

Connect ends comply to
BS21.0 (BSPT)

Test pressure (MSS SP-80)		bar
shell test	37.5	
seat test	27.5	
air test	6	

ISO 9001 FM584850

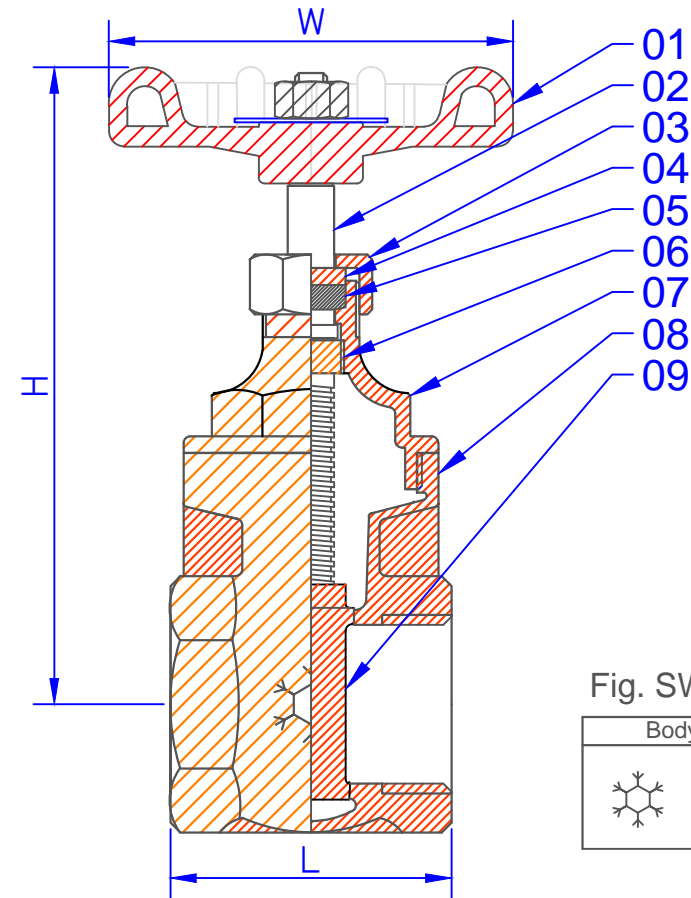


Fig. SW-206

Body Marking		
	DN20	
	PN25	

9	Disc	Bronze
8	Body	Bronze
7	Bonnet	Bronze
6	Stem ring	Brass
5	Packing	PTFE
4	Packing ring	Brass
3	Packing gland	Brass
2	Stem	Brass
1	Handle wheel	Aluminum
No.	Part Name	Material

Dimensions

(mm)

Size	8mm	10mm	15mm	20mm	25mm	32mm	40mm	50mm	65mm	80mm	100mm
H			85	100	110	125	140	180			
L			49	56	63	75	80	90			
W			54	61	68	77	83	105			