



# Bronze Y-Strainer


ISO 9001 FM584850

2020.1

Fig.ST-002

### Feature

1. SUS 304 screen, mesh 20.
2. Round body design for fast flow.
3. Two layers when screen smaller than mesh 20.
4. Working pressure 150LBS.

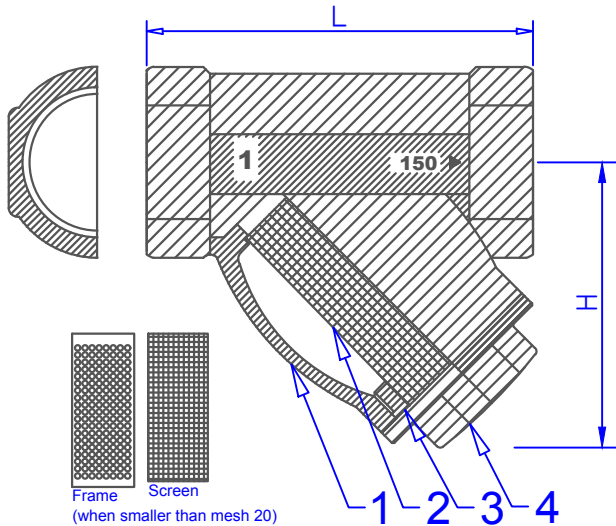

| No. | Description | Material      | Q'ty | Note    |
|-----|-------------|---------------|------|---------|
| 01  | Body        | Bronze C84400 | 1    |         |
| 02  | Screen      | SS304         | 1    | mesh 20 |
| 03  | Gasket      | PTFE          | 1    |         |
| 04  | Cap         | Bronze C84400 | 1    |         |
| 05  | Plug        | Brass         | 1    | option  |

### Dimension

unit : mm

| SIZE | 1/2" | 3/4" | 1" | 1-1/4" | 1-1/2" | 2"  | 2-1/2" | 3"  |
|------|------|------|----|--------|--------|-----|--------|-----|
| L    | 58   | 70   | 85 | 105    | 122    | 145 | 184    | 215 |
| H    | 49   | 60   | 64 | 74     | 92     | 108 | 136    | 150 |

### Series Y-Strainer

ST-001s Bronze Y-Strainer, PN16 (economic type)

ST-001 Bronze Y-Strainer, 150LBS



2020.1

Website : valve-toho.com